

Serial to Ethernet Converter

■ ■ ■ USR-TCP232-410s

Serial-Ethernet converter access to Network


USR-TCP232-410s is an ultimate serial converter connect to RS232/RS485 based equipment across an ethernet network enable you to replace serial dial-up modem connection.

To realize two-way transparent transmission between COM and TCP/IP,manage COM on remote device over network.

To communicate to multiple serial devices at the same time across a LAN or WAN network.

■ ■ ■ RS232&RS485 to Ethernet

- Modbus Gateway function, support Modbus TCP to Modbus RTU in bi-directional
- Virtual COM ports connect PC/servers to remote serial devices over Ethernet
- Modbus Polling Function
- Hardware Flow control: RTS/CTS
- HTTPD Client and Websocket function available
- Both serial ports can be used individually at the same time.
- The global unique MAC address bought from IEEE, defined MAC address is available
- Wide voltage input 5 ~ 36V, more applications
- Support DNS & DHCP, automatically access IP
- Up to 8 simultaneous clients when act as TCP Server
- Reload button, a key restore default Settings

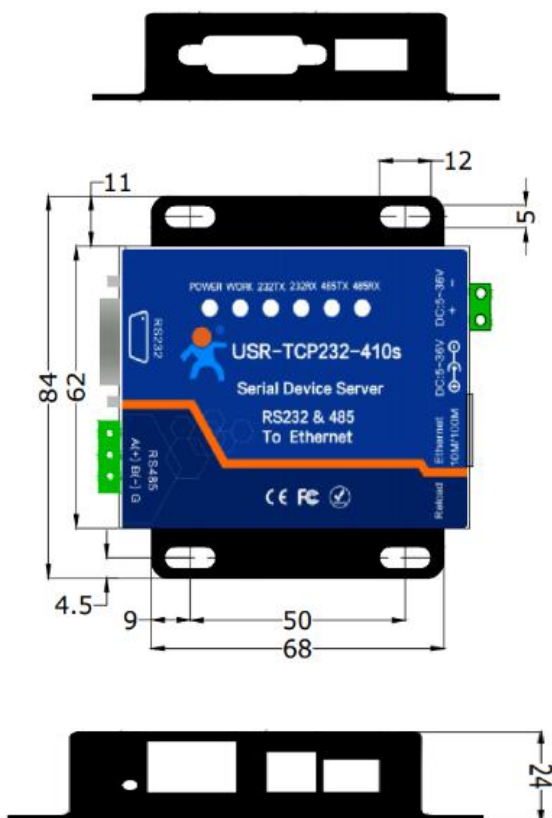

Specifications

System Information

Processor	Cortex-M4
Basic Frequency	120MHz
Flash	512K byte

Ethernet

Port Number	1
Interface Standard	8 pin RJ45
Rate	10/100 Mbps auto-detection
Receive Buffer	Max 16k bytes buffer
Network Protocol	IP, TCP, UDP, DHCP, DNS, HTTP, ARP, ICMP Web socket, HTTPD Client

Protection	2KV electromagnetism isolation shell insulation blocking
------------	--

Auto MDI/MDIX	Yes
---------------	-----

Serial

Ports	2-ports
Interface	RS-232*1, 9-pin D-sub RS-485*1, 2 wire (A+, B-)

Baud Rate	RS-232: 600 bps ~ 256K bps RS-485: 600 bps ~ 1024K bps
-----------	---

Data Bits	5, 6, 7, 8
-----------	------------

Stop Bit	1, 1.5, 2
----------	-----------

Check Bit	None, Even, Odd, Space, Mark
-----------	------------------------------

Flow Control	Hardware: RTS/CTS
--------------	-------------------

Buffer	Send and receive 2k bytes respectively
--------	--

Protection	RS-485: 2KV ESD, lightning protection
------------	---------------------------------------

Resistor	RS-485 Pull-up and Pull-Down: 2.2 KΩ
----------	--------------------------------------

Software

Virtual Serial	Windows 2000 or higher (32 bit/64 bit)
----------------	--

Configuration	Webpage/ Set-up software/ Serial command
---------------	--

Basic Parameter

Dimensions	90 x 84 x 25 mm (including shell and terminals)
------------	---

Operating Temp.	-40 ~ 85°C
-----------------	------------

Storage Temp.	-40 ~ 85°C, 5 ~ 95% RH
---------------	------------------------

Power

Input	DC 5 ~ 36V adapter or 5.08-2 terminal
-------	---------------------------------------

Working Current	90mA @ 5V <50mA @ 12V
-----------------	--------------------------

Consumption	<1W
-------------	-----

Accessories

Power Adapter	5V1A power supply
---------------	-------------------

DB9 cable	Female to female serial cable
-----------	-------------------------------

More

Certificate	CE, FCC, ROHS
-------------	---------------

Warranty	2 years
----------	---------

MTBF	100 thousand hours
------	--------------------

Jinan USR IOT Technology Limited

Tel: 86-531-88826739

Email: Sales@usriot.com

